

www.simotrade.hu

STAR LED

FELHASZNÁLÁSI TERÜLET

AZ IP65-ös STAR LED lámpatestek a tömített lámpaháznak köszönhetően por, szennyeződés és nedvesség behatolásával szembeni nagyfokú védettséggel rendelkeznek. Széleskörűen alkalmazhatók üzemek, műhelyek, csarnokok és egyéb poros és párás helyiségek megvilágítására.

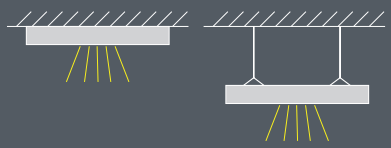

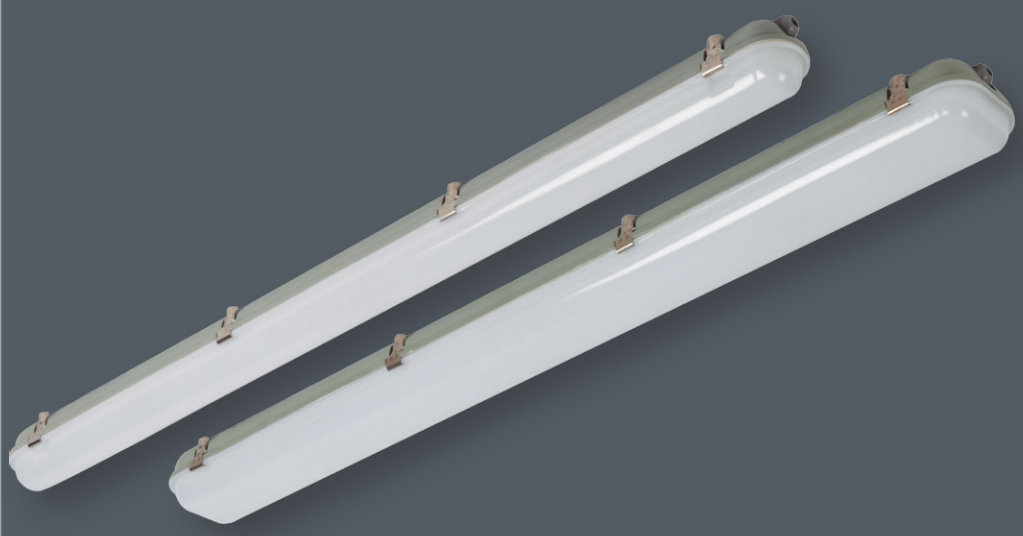

ANYAG

Lámpatestház: fröccsöntött polikarbonát (PC), szürke színben.
Bura: fröccsöntött opál polikarbonát (PC), UV állóságot biztosító adalékkal.
Húzózár: rozsdamentes acél.
Tömítés: a testbe ragasztott, öregedésálló szilikon habgumi.
Kábelbevezetés: tömszelencén keresztül.

RÖGZÍTÉS

A lámpatestek mennyezetre vagy függesztve szerelhetők. A lámpatesteket kültéren az időjárás viszontagságai ellen védett, fedett zónában lehet felszerelni.

BASE MATERIAL

Housing of the luminaire: injection molded polycarbonate (PC) in grey colour.
Diffuser: injection molded opal polycarbonate (PC) with UV resistance additive.
Clip: stainless steel.
Gasket: anti-aging foam rubber, glued to the body.
Cable routing: through plastic gland.

INSTALLATION

The luminaires can be mounted onto ceilings or suspended. In case of exterior usage, the luminaires have to be protected from the vicissitudes of weather, must be mounted in roofed zone.

Garancia 5 ÉV | LED | 230V 50Hz | UGR <26 | CRI >80 | SDCM 3 | CCT 4000K | IP 65 | 120° | Ta 25°C | CE

Rendelési kód	Típus	LED Modulok fényárama (lm)	LED Modulok hatékonysága (lm/W)	Lámpatest fényárama (lm)	Lámpatest hatékonysága (lm/W)	LED Modulok teljesítménye (W)	Lámpatest fogyasztása (W)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Súly (kg)
60 003 136 545	STAR LED-136	3320	166	2920	121	20	24	1260	82	86	900	67	1,7
60 003 158 820	STAR LED-158	4750	158	4120	121	30	34	1560	82	86	1200	67	2,1
60 003 236 542	STAR LED-236	6640	166	5780	126	40	46	1260	127	86	900	67	2,5
60 003 236 541	STAR LED-236	8840	164	7430	126	54	59	1260	127	86	900	67	2,5
60 003 258 517	STAR LED-258	14450	157	11680	118	92	99	1560	127	86	1200	67	3,2

Opciók: CRI >90 | CCT 3000K | EMERGENCY

